



4700 W. 160th St.  
Cleveland, Ohio 44135  
Ph: (800) 321-9532  
Fax: (800) 321-9535  
www.oatey.com



## 76000 Series PVC Sediment Drains



### SUBMITTAL SPECIFICATION

**Engineering Specification:** Commercial grade multipurpose drain for effective effluent removal in any application. Optional removable sediment bucket will keep drain lines free of all debris. Available with cast iron and PVC grate assemblies.

Job Reference

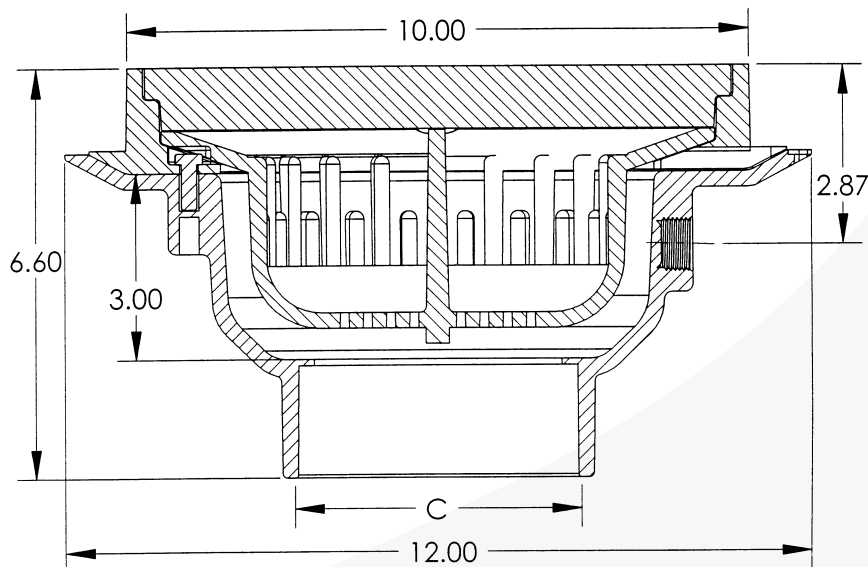

(All dimensions in inches)

- Barrel diameter is 3-1/2 in. IPS thread.
- Primer tap knock-out is 1/2 in. FIP thread.

✓	Socket Size (C)	Base Material	Grate Material	Sediment Bucket	Part Number
	2 in.*	PVC	Plastic	With	76012
	2 in.*	PVC	Plastic	Without	76022
	2 in.*	PVC	Cast Iron	With	76032
	2 in.*	PVC	Cast Iron	Without	76042
	3 in.	PVC	Plastic	With	76013
	3 in.	PVC	Plastic	Without	76023
	3 in.	PVC	Cast Iron	With	76033
	3 in.	PVC	Cast Iron	Without	76043
	4 in.	PVC	Plastic	With	76014
	4 in.	PVC	Plastic	Without	76024
	4 in.	PVC	Cast Iron	With	76034
	4 in.	PVC	Cast Iron	Without	76044
	6 in.	PVC	Plastic	With	76016
	6 in.	PVC	Plastic	Without	76026
	6 in.	PVC	Cast Iron	With	76036
	6 in.	PVC	Cast Iron	Without	76046

\*2 in. base includes 3 in. x 2 in. bushing.

Grate Properties		
Finish	Open Area	Load*
Plastic	32.50 in. <sup>2</sup>	Light
Cast Iron	32.50 in. <sup>2</sup>	Medium

\*Load is defined by ASME A112.21.1M.

Light Duty – Safe live load under 2000 lbs.

Medium Duty – Safe live load between 2000 lbs. and 4999 lbs.